

# ASView-T

## Marine Target Control System


The ASView-T control system is designed specifically for use with the C-Target range of ASVs and customer supplied vessels being converted for target operations. The system allows up to four target vessels to be commanded over a single radio network allowing multiple target manoeuvres to be undertaken.

ASView-T was developed in 2008 and has seen continuous use since on naval and air force gunnery, rocket and missile firing operations. It is highly reliable ensuring valuable firing range time is not wasted and limited trials time can be optimally used.

### KEY FEATURES



- Direct remote control and nautical chart view via ASView-T-Console
- Assisted remote control; heading and track hold
- Mission plan consisting of lines and waypoints
- ASView-T-Console can control up to four C-Targets at one time
- Supports a variety of navigation sensors
- Able to control and monitor engines
- Safety features include emergency stop buttons
- Compatible with a UHF long range communications system

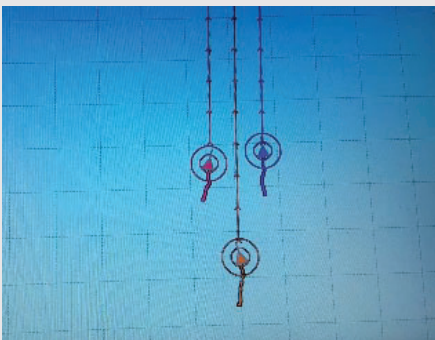


ASV is a leading manufacturer of Unmanned and Autonomous Marine Systems with specialist expertise and experience in platform concept design, build and commissioning, operation and maintenance. With bases in the UK and USA, ASV supplies systems to military and commercial organisations across the globe.

# ASView-T

## TECHNICAL SPECIFICATIONS

<b>ASView-T-Core</b>	ASView-T-Core is a standardised target control enclosure containing all the hardware and software required to control ASV's range of target C-Targets or a customer supplied vessel. The box can control single or twin outboard engine configurations and can easily be adapted to interface with further propulsion arrangements.
<b>ASView-T-Base</b>	ASView-T-Base is a ruggedized enclosure that houses a point to multi point radio communications system supporting up to four target vessels. An ASView-T-Console unit is connected to the ASView-T-Base for each target being controlled.
<b>ASView-T-Console</b>	The ASView-T-Console is used by the target operator to manually tele-operate the target or plan and execute waypoint based mission plans. The operator is provided touchscreen user interface, a video feedback screen and joysticks and buttons required for manual tele-operation.
<b>ASView-T Communications System</b>	ASView-T as standard is delivered with a UHF point to multipoint radio system and can be optionally supplied with an L-Band video feedback system.

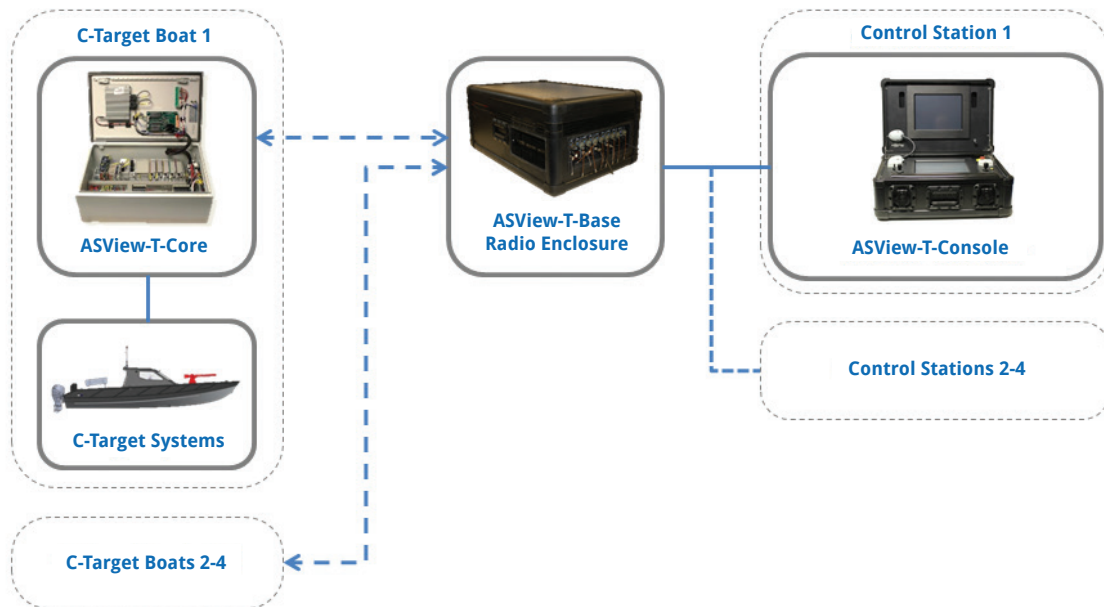

Unit 12 Murrills Estate  
Southampton Road  
Portchester  
PO16 9RD  
UK  
+44 (0)2392 382 573  
sales@asvglobal.com

Rua Visconde de Inhauma  
83, 17th Floor, Centro  
Rio de Janeiro  
Brazil  
20271-061  
+55 21 3799-4012  
sales@asvglobal.com

11111 Katy Freeway, Suite 910  
Houston  
TX 77079  
USA  
+1 713 357 6622  
sales@asvglobal.com

209 Cummings Road  
Broussard  
LA 70518-3229  
USA  
+1 337 422 4411  
sales@asvglobal.com

© ASV 2017. All rights reserved.  
This publication is for outline information only and may not be used, applied or reproduced for any purpose. The company reserves the right to alter without notice the specification design, or conditions of supply of any product or service.

